

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 December 2004 (29.12.2004)

PCT

(10) International Publication Number
WO 2004/113671 A1

(51) International Patent Classification⁷: **E21B 43/12**

(21) International Application Number:
PCT/NO2004/000175

(22) International Filing Date: 15 June 2004 (15.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20032916 25 June 2003 (25.06.2003) NO

(71) Applicant (for all designated States except US):
RESLINK AS [NO/NO]; P.O. Box 204, N-4339 Ål-
gård (NO).

(72) Inventors; and

(75) Inventors/Applicants (for US only): DYBEVIK, Arthur,

H. [NO/NO]; Harriet Backersgate 19, N-4307 Sandnes
(NO). KVERNSTUEN, Svein [NO/NO]; Høgevollsveien
46 A, N-4327 Sandnes (NO).


(74) Agent: HÅMSØ PATENTBYRÅ ANS; P.O. Box 171,
N-4302 Sandnes (NO).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: A DEVICE AND A METHOD FOR SELECTIVE CONTROL OF FLUID FLOW BETWEEN A WELL AND SUR-
ROUNDING ROCKS

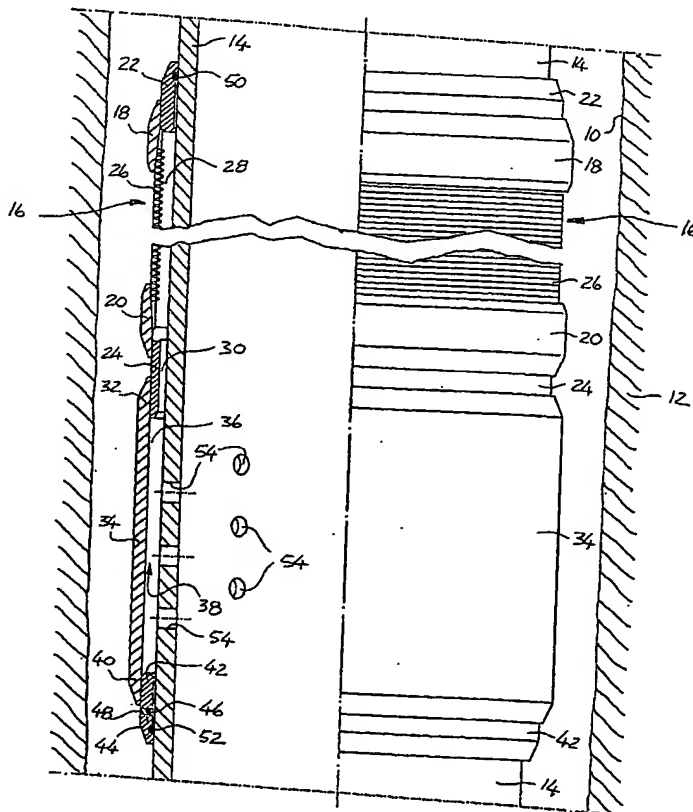

(57) Abstract: A device and a method for selective control of fluid flow between a flow pipe (14) of a well and surrounding rocks (12). The flow pipe (14) is provided with at least one flow through particle filter (16) placed externally on the flow pipe (14) and between the flow pipe (14) and the rocks (12). The filter (16) is connected in a flow-through manner to the flow pipe (14) via a flow channel (38). The characteristic of the invention is that the flow pipe (14) is provided with an imperforated pipe wall inside of and vis-à-vis said flow channel (38) when installing the flow pipe (14) in the well. Then the flow pipe (14) may be perforated selectively inside of the flow channel (38) for one or several filters (16) along the flow pipe (14), whereupon fluids may flow through the flow channel (38) and the filter (16) via perforation apertures (54) in the flow pipe (14).

WO 2004/113671 A1



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

— before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*